




## Water Pumps

### GENERAL PURPOSE PUMPS

- For agriculture, irrigation and water transfer over a long distance
- Ideal for general water pumping applications on the farm, home, garden or for light - commercial applications
- **TAW070**, **TAW071** and **TAW072** are capable of handling solids up to 1/4", have an Oil Alert™ feature shuts down engine if oil drops below a safe operating level, have a cast aluminum pump housing, impeller and volute and have a mechanical (silicon carbide) seal

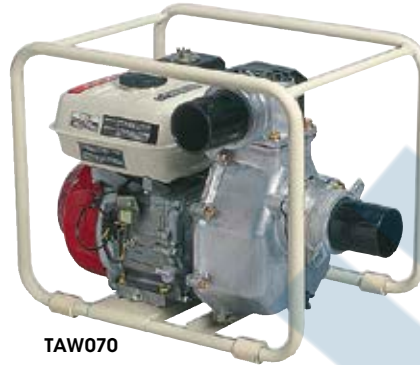

TAW070



TAW082



Model No.	TAW082 1" Water Pump	TAW070 2" Water Pump	TAW071 3" Water Pump	TAW072 4" Water Pump
<b>Engine:</b>	4-Stroke Honda GX25, 1 HP	4-Stroke Honda GX120, 4 HP	Honda GX160 OHV, 5.5 HP	Honda GX240 OHV, 8.0 HP
<b>Port Size:</b>	1" x 1" (25 mm x 25 mm)	2" x 2" (50 mm x 50 mm)	3" x 3" (75 mm x 75 mm)	4" x 4" (100 mm x 100 mm)
<b>Maximum Capacity:</b>	117 litres/min - 31 GPM	518 litres/min - 137 GPM	1100 litres/min - 290 GPM	1800 litres/min - 476 GPM
<b>Suction Lift:</b>	26'	26'	26'	26'
<b>Maximum Head:</b>	114' (34.75 metres)	137' (41.76 metres)	106' (32 metres)	93' (28.35 metres)
<b>Dimensions:</b>	12.4" L x 8.86" W x 13.4" H	12.4" L x 8.86" W x 13.4" H	21.6" L x 15.4" W x 17.5" H	25.6" x 18.3" W x 24.2" H
<b>Weight:</b>	10 lbs.	10 lbs.	66 lbs.	110 lbs.
<b>Price/Each:</b>	\$	\$	\$	\$

## Trash Pumps

### GENERAL PURPOSE PUMPS

- High output trash pumps, capable of handling solids up to 1" diameter
- Removable front cover for easy cleaning and maintenance
- Oil Alert™ feature shuts down engine if oil drops below a safe operating level
- Cast aluminum pump housing
- Cast iron impeller and volute
- Silicon carbide mechanical seal



TAW073



Model No.	TAW073 2" Water Pump	TAW074 3" Water Pump
<b>Engine:</b>	Honda GX160 OHV, 5.5 HP	Honda GX240 OHV, 8.0 HP
<b>Port Size:</b>	2" x 2" (50 mm x 50 mm)	3" x 3" (75 mm x 75 mm)
<b>Maximum Capacity:</b>	600 litres/min - 158 GPM	1300 litres/min - 343 GPM
<b>Suction Lift:</b>	26' (8.0 metres)	26' (8.0 metres)
<b>Maximum Head:</b>	85' (25.9 metres)	92' (28 metres)
<b>Dimensions:</b>	25" L x 17" W x 19.5" H	29.5" L x 20.8" W x 25.7" H
<b>Weight:</b>	99 lbs.	132 lbs.
<b>Price/Each:</b>	\$	\$

## Gas Powered Water Pumps

- Powerful 7.0 HP, 4-stroke, air-cooled, OHV gasoline engine
- 92' total head lift (total height at sea level, to which water can be raised above original water level)
- Oil sensor shuts off engine when oil level is low
- Self-priming pump for easy operation
- Cast iron impeller and aluminum alloy high pressure pump body casting
- Easy start recoil starter
- Heavy-duty roll cage protects engine and pump
- Comes with three wire clamps, four hose adaptors, four rubber gaskets, strainer basket and strainer basket adaptor
- Total Head Lift Ft.: 92
- Suction Head Lift Ft.: 26
- Engine HP: 7.0
- Engine Speed RPM: 3600
- Displacement CC: 196
- Fuel Tank L: 3.6
- Oil Capacity L: 0.6



DC503



DC504

Model No.	Mfg. No.	Inlet/Outlet Dia."	Max. Pump Capacity L/min.	Dimensions L" x W" x H"	Wt. lbs.	Price /Each
DC503	KCG-3PG	3	835	20 x 14 3/4 x 17 1/4	56	
DC504	KCG-2PGN	2	600	17 1/2 x 14 1/2 x 15	52	