



Polypropylene Strapping

- The most inexpensive of all strapping materials
- Lightweight, easy to apply and recyclable
- Available in both manual and machine grade
- Manual application is ideal for low and moderate volume users
- Ideal for light duty palletizing, unitizing, carton closing and bundling



Model No.	Colour	Strap Width"	Strength lbs.	Feet /Coil	Coils /Carton	Dim. Core"	W"	Wt. lbs.	Price /Each
MACHINE GRADE									
PA526	White	3/8	300	12900	1	8	8	28	
PF073	White	1/2	300	9900	1	8	8	31	
MANUAL GRADE									
PF079	Black	5/8	500	7500	1	8	8	31	
PF067	Black	5/8	700	6000	1	8	8	31	
PF078	Black	3/4	1050	4500	1	8	8	31	
PF075	Black	1/2	600	7200	1	8	8	31	
PF071	Black	1/2	750	5575	1	16	6	40	
PF077	Black	5/8	850	6000	1	8	8	31	
PF074	Black	5/8	1100	4400	1	16	6	40	
PF083	Black	1/2	600	7200	1	16	6	31	

Polypropylene Strapping w/Buckles

- Hand strap large or small packages of all shapes
- Self dispensing box for convenience
- Includes 360 steel buckles
- This unit comes factory set at 1/2" but can easily be adjusted to strap width 5/8", 1/4" or 3/8"



Model No.	Strap Width"	Strength lbs.	Length'	Price /Each
PF072	1/2	300	3300	



Edge Protectors

These plastic edge protectors spread strapping tension across a 2" surface. Protects packages from surface damage. 1" L x 1 1/4" W.

- For use with strapping up to 3/4"
- Quantity of 1000 per package
- Priced per package

Model No. PA497
Price/Each \$




1/2" Polypropylene Strapping Kits

Consists of the following components:

- 1- PF985 1/2" x 5600', 750-lb strength poly strapping
- 1- PE555 dispenser
- 1- PA555 1/2" poly sealer
- 1- PC939 polypropylene and polyester tensioner
- 1- PF408 1/2" open seals, 2000/box

Model No. PD023
Price/Each \$

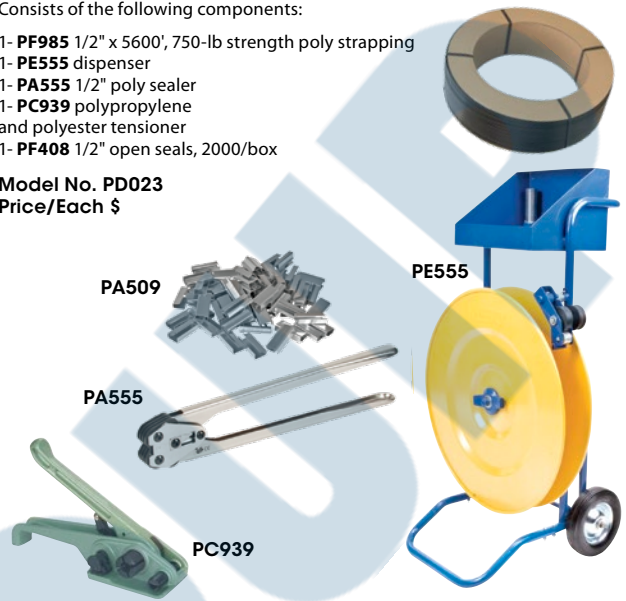

Semi-Automatic Strapping Machines

- Quick, efficient strapping of packages of almost any size or shape
- Stabilized tensioning controlled electronically – can be adjusted from 4.4 to 88 lbs.
- Automatically feeds, tension and heat seals the strap
- Few moving parts, making it easy to maintain and keep operation costs low
- Runs 5 to 15.5 mm polypropylene strapping without changing parts
- Ready to operate in 45 seconds

Specifications

Strap width: 1/4", 3/8", 1/2", 5/8"
Power supply: 100-120V, 220-240V, 1 Phase 50-60 Hz
Tension range: up to 88 lbs.
Dimensions: 30 3/4" W x 30 1/2" H x 21 3/8" D
Weight: 88 lbs.

Model No. PF082
Price/Each \$



Seals & Buckles For Polypropylene Strapping

Model No.	Strap Width"	Type	Qty /Box	Price /Each
STEEL SEALS				
PA509	1/2	Open	2000	
PA510	5/8	Open	2000	
PC886	3/4	Open	1000	
PLASTIC BUCKLES				
PA500	3/8	Plastic	1000	
PA498	1/2	Plastic	2000	
PA499	5/8	Plastic	2000	
WIRE BUCKLES				
PA501	1/2	Wire	2000	
PA502	1/2	H.D. Wire*	1000	
PA503	5/8	Wire	2000	
PA504	5/8	H.D. Wire*	1000	

Note: Recommended for strap with strength over 400 lbs.

Steel Seals



Plastic Buckles



Wire Buckles

