



## 7 1/4" Circular Saws w/High Strength Base

- High strength base will withstand a one story drop
- 56° beveling capacity with stops at 45° and 22.5°
- Electric brake stops blade after use
- Includes: Carbide tipped blade, blade wrench and contractor bag

**Model No. TSW598**  
**Mfg. No. DWE575SB**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 15.0  
**No Load RPM:** 5200  
**Depth of Cut at 45°:** 1 3/4"  
**Depth of Cut at 90°:** 2 1/2"  
**Tool Weight:** 8.8 lbs.



## Worm Drive 7 1/4" Circular Saws

- Lightweight magnesium and aluminum construction including durable magnesium foot plate
- Extra wide saw hook accepts materials up to 2-3/4"
- ToughCord™ cord protection system with cord jerk protection
- Electric brake stops the blade after trigger is released
- Accepts DWS5100 Dual Port Rip Guide (sold separately)
- Includes: Worm drive circular saw with grounded plug, 7-1/4" Carbide blade, Blade changing wrench

**Model No. UAI800**  
**Mfg. No. DWS535B**  
**Price/Each \$**

### SPECIFICATIONS

**Blade Diameter:** 7-1/4"  
**No Load RPM:** 4800  
**Amps:** 15 A  
**Voltage:** 120 V  
**Bevel Capacity:** 53°  
**Bevel Stops:** 22.5°, 45°



## 7 1/4" Circular Saws

- High power, maximum cutting depth of 2 1/2"
- Electric brake, twin LED lights, heavy gauge aluminium base with ruler markings
- Bevel adjustment with positive stops at 22.5° and 45°
- Includes: Guide rule, hex wrench, carbide tipped black M-Force saw blade

**Model No. TLV574**  
**Mfg. No. 500FA**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 15.0  
**No Load RPM:** 5800  
**Depth of Cut at 45°:** 1 3/4" (1 3/8" at 50°)  
**Depth of Cut at 90°:** 2 1/2"  
**Tool Weight:** 11.1 lbs.



## 7 1/4" Circular Saws

- Heavy-duty aluminum base plate for jobsite durability
- Well balanced design for better control from above or behind the saw
- Bevel capacity of 45°
- Includes: 1 ea. 7-1/4" Blade 24T, Wrench 13 (782016-4)

**Model No. TF382**  
**Mfg. No. 5007NB**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 15.0  
**No Load RPM:** 5800  
**Depth of Cut at 45°:** 1 3/4"  
**Depth of Cut at 90°:** 2 3/8"  
**Tool Weight:** 11.2 lbs.




## 7 1/4" Left Blade Circular Saws

- Handle position can be moved to eight different positions
- Full 50° bevel capacity
- Cut visibility for right hand users with the blade on the left side
- Includes: Case, blade and hex blade wrench

**Model No. TEA172**  
**Mfg. No. 6391-21**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 15.0  
**No Load RPM:** 5800  
**Depth of Cut at 45°:** 1 13/16"  
**Depth of Cut at 90°:** 2 7/16"  
**Tool Weight:** 10.4 lbs.

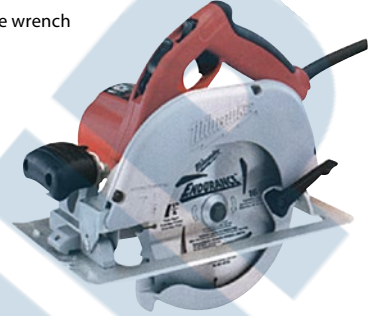

## Tilt-Lok™ 7 1/4" Circular Saws

- Handle can be moved to different positions
- Full 50° bevel capacity
- Quick-Lok™ cord
- Includes: Blade and hex blade wrench

**Model No. TEA173**  
**Mfg. No. 6394-21**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 15.0  
**No Load RPM:** 5800  
**Depth of Cut at 45°:** 1 13/16"  
**Depth of Cut at 90°:** 2 7/16"  
**Tool Weight:** 10.4 lbs.



## 8" Metal Cutting Saws

- Durable blade shield with integral chiptank deflects hot chips and sparks
- Quick-release shield latch for fast waste disposal and blade changes
- Lever's location ensures user has both hands firmly on the saw
- Includes: Case, circular saw blade and hex blade wrench

**Model No. TEX280**  
**Mfg. No. 6370-21**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 13.0  
**No Load RPM:** 3700  
**Depth of Cut at 90°:** 2 9/16"  
**Tool Weight:** 13.3 lbs.



## 8 1/4" Circular Saws

- High performance magnesium blade casing and base
- Bevel adjustment with positive stops at 22.5°, 45°, and 50°
- Electric brake, two built in LED lights, rubberized grips
- Includes: Carbide tipped blade, guide rule, hex wrench

**Model No. TLY363**  
**Mfg. No. 5008MGA**  
**Price/Each \$**

### SPECIFICATIONS

**Amperage:** 15.0  
**No Load RPM:** 5200  
**Depth of Cut at 45°:** 2 1/4" (2" at 50°)  
**Depth of Cut at 90°:** 3  
**Tool Weight:** 11.2 lbs.

