




## 7" x 12" Mini Metal Lathes


- Clear plastic safety guard automatically shuts lathe off when lifted
- Forward/reverse control
- Variable speed control: 0-2500 RPM
- Includes: 4" 3-jaw chuck, quick change gear box, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, emergency stop button, chuck key and hex keys

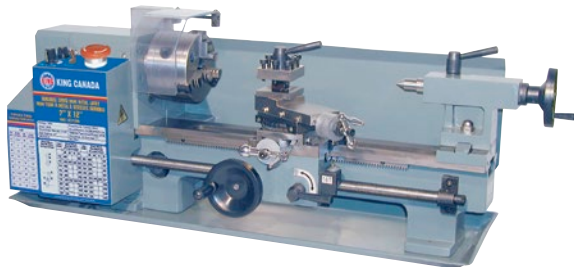

<b>Model No.</b>	<b>TEB019</b>
<b>Mfg. No.</b>	KC-0712ML
<b>Distance between centers:</b>	12"
<b>Swing over bed:</b>	7"
<b>Spindle bore:</b>	3/4"
<b>Swing over cross slide:</b>	4 1/2"
<b>Taper in headstock:</b>	MT#3
<b>Taper in tailstock:</b>	MT#2
<b>Width of bedways:</b>	3 1/4"
<b>Total travel of cross slide:</b>	2 3/4"
<b>Total travel of top slide:</b>	3"
<b>Spindle variable speeds:</b>	2 (0-1100 RPM, 0-2500 RPM)
<b>Thread cutting range:</b>	12-52 TPI
<b>Motor:</b>	5.5 A, 1 phase, 60 Hz
<b>Voltage:</b>	110 V
<b>Dimensions:</b>	32" L x 11 1/2" W x 13" H
<b>Weight:</b>	85 lbs.
<b>Price/Each</b>	\$

## 10" x 22" Belt Drive Metal Lathes


- Safety chuck guard automatically shuts lathe off when lifted
- Includes: 5" 3-jaw chuck, 6 1/2" 4-jaw chuck, replacement gears, 4-way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex keys

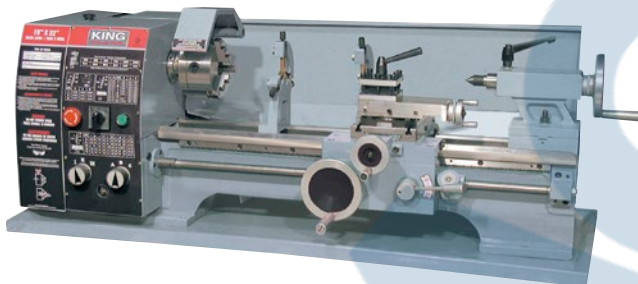

<b>Model No.</b>	<b>TEB020</b>
<b>Mfg. No.</b>	KC-1022ML
<b>Distance between centers:</b>	22"
<b>Swing over bed:</b>	10"
<b>Spindle bore:</b>	1"
<b>Swing over cross slide:</b>	6"
<b>Taper in headstock:</b>	MT#4
<b>Taper in tailstock:</b>	MT#3
<b>Width of bedways:</b>	6"
<b>Total travel of cross slide:</b>	6 3/8"
<b>Total travel of top slide:</b>	4 1/4"
<b>Spindle speeds:</b>	6 (150-2400 RPM)
<b>Thread cutting range:</b>	8-72 TPI
<b>Motor:</b>	1 HP, 12 A, 1 phase, 60 Hz
<b>Voltage:</b>	110 V
<b>Dimensions:</b>	50" L x 23" W x 19" H
<b>Weight:</b>	360 lbs.
<b>Price/Each</b>	\$

## 12" x 36" Gearhead Metal Lathes

- Safety guard automatically shuts lathe off when lifted
- Includes: 6" 3-jaw chuck, 8" 4-jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex keys

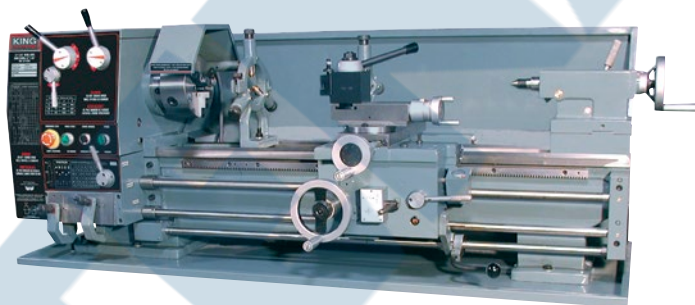

<b>Distance between centers:</b>	36"
<b>Swing over bed:</b>	12"
<b>Swing over gap:</b>	18"
<b>Spindle bore:</b>	1 1/2"
<b>Swing over cross slide:</b>	7 1/4"
<b>Taper in headstock:</b>	MT#5
<b>Taper in tailstock:</b>	MT#3
<b>Width of bedways:</b>	7 1/4"
<b>Total travel of cross slide:</b>	6 3/8"
<b>Total travel of top slide:</b>	3 3/8"
<b>Spindle speeds:</b>	9 (60-1500 RPM)
<b>Thread cutting range:</b>	4-112 TPI
<b>Motor:</b>	1.5 HP, 8.7 A, 1 phase, 60 Hz
<b>Voltage:</b>	220 V
<b>Dimensions:</b>	65" L x 28" W x 28" H
<b>Weight:</b>	710 lbs.
<b>w/o Taper Attachments</b>	
<b>Model No.</b>	<b>TEB021</b>
<b>Mfg. No.</b>	KC-1236ML
<b>Price/Each</b>	\$
<b>w/Taper Attachments</b>	
<b>Model No.</b>	<b>TMA038</b>
<b>Mfg. No.</b>	KC-1236ML/KM053
<b>Price/Each</b>	\$

## Stands



**Model No.**  
**Mfg. No.**  
**Fits:**  
**Price/Each**

**TEB024**  
SS-1022  
TEB020  
\$

**TEB028**  
SS-1236  
TEB021  
\$

