




Welding Hose Reels

- Heavy-duty, reinforced steel stampings for increased strength
- 1/4" oxygen and acetylene twin hose
- Leakproof double O-ring seals
- Compact design allows reels to fit in tight locations
- Multi-position guide arms for multiple mounting options
- Kinkless, oil resistant high quality hose
- Spring rewind features long life spring with declutching arbor
- Grade R hose
- Durable, corrosion-resistant powder coat paint

aurora tools

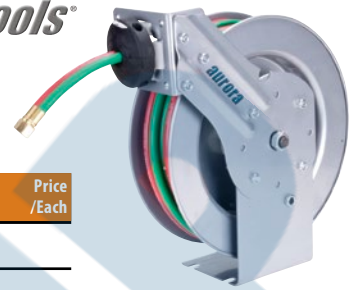

Model No.	Drive Type	Hose I.D."	Hose Length'	Max PSI	Oxygen Inlet & Outlet	Acetylene Inlet & Outlet	Dimensions			Wt lbs.	Price /Each		
TLZ487	Spring	1/4	25	300	9/16" x 18 UNF (Female)	9/16" x 18 UNF (Female)	8	x	14 3/4	x	13 5/8	25.9	
TLZ488	Spring	1/4	50	300	9/16" x 18 UNF (Female)	9/16" x 18 UNF (Female)	8 5/8	x	20 1/2	x	20 1/2	42.2	

Hose Reels

- Heavy-duty, reinforced steel stampings for increased strength
- For use with air and water
- Compact design allows reels to fit in tight locations
- Multi-position guide arms for multiple mounting options
- Kinkless, oil resistant high quality hose
- Spring rewind features long life spring with declutching arbor
- Durable, corrosion-resistant powder coat paint
- Good for air and water

aurora tools



Model No.	Drive Type	Hose I.D."	Hose Length'	Max PSI	Hose Outlet (M) NPT"	Reel Inlet (F) NPT"	Dimensions			Wt lbs.	Price /Each		
TLZ482	Spring	1/4	35	300	1/4	3/8	6	x	15 1/2	x	14	26.6	
TLZ483	Spring	3/8	25	300	1/4	3/8	6	x	15 1/8	x	13 7/8	26.2	
TLZ484	Spring	3/8	35	300	1/4	3/8	6 5/8	x	17 1/2	x	16 1/2	34.7	
TLZ485	Spring	3/8	50	300	1/4	3/8	6 1/2	x	20	x	18 3/8	40.3	
TLZ486	Spring	1/2	50	300	1/2	1/2	6 5/8	x	20 1/4	x	17 7/8	44.3	

Arc Welding Reels

POWER OR MANUAL REWIND TO HANDLE #2 THROUGH 4/0 CABLE TO 400 AMPS

- 400-amp rated rotary electrical device
- Instant use with any cable length unwound
- For use with single conductor electrode cable or grounding lead
- Quick connection to your welder
- 4-way roller assembly
- Roller position must be specified


SWCR SERIES

- Non sparking ratchet assembly
- Declutching arbor is provided to prevent damage from reverse winding
- A cable stop should be used



WCR SERIES

- Gear driven crank rewind, chain and sprocket powered by an electric, hydraulic or compressed air motor
- Auxiliary rewind and pinion brake standard



Hannay Reels
The reel leader.

Model No.	Mfg. No.	Cable Capacity of Reel'							Approx. Weight		Standard Roller Assembly	Price /Each
		Gauge of Cable O.D."	#2 0.50	#1 0.58	1/0 0.62	2/0 0.67	3/0 0.72	4/0 0.81	Net lbs.	Ship lbs.		
SWCR												
886-1130	SWCR716-23-24-15.5G		85	85	60	60	60	40	85	120	R204	
TTT563	SWCR716-25-26-15.5B		-	-	-	-	60	50	91	126	R204	
TTT564	SWCR716-25-26-15.5A		-	-	100	-	-	-	106	141	R205	
WCR												
886-1921	WCR16-19-21		-	275	200	200	150	150	71	106	-	
TTT565	WCR16-23-24		-	-	-	-	300	200	78	113	-	



Gas Welding Reels

SPRING REWIND TO HANDLE TWIN 1/4" THROUGH 3/8" WELDING HOSE

- Heavy-duty spring motor
- Non sparking ratchet assembly
- Declutching arbor to prevent damage from reverse winding
- Standard inlets 90° ball bearing swivel joints 1/2" female NPT threads
- Standard outlets male 9/16"-18 threads right hand for oxygen, left hand for gas
- Pressures to 300 PSI (21 bar)
- Temperatures from -40°F to 200°F (-40°C to 93°C)
- Type of gas used MUST be specified
- 4-way roller assembly (roller position must be specified)
- Hose stop is required
- Hose sold separately

Hannay Reels
The reel leader.

Shown with optional hose and hose stop in the optional "TR" position



Model No.	Mfg. No.	Hose Capacity of Reel'			Approx. Wt.		Standard Roller Assembly	Price /Each
		I.D." O.D."	1/4 0.53	3/8 0.66	Net lbs.	Ship lbs.		
TTV150	N416-17-18-8L	2/50	-	-	64	71	N204	
TTV151	N416-19-20-8L	-	2/50	-	68	75	N204	
TTT568	N416-19-20-10.5C	2/25	2/25	-	70	77	N204	
886-1060	N416-19-20-8J	2/50	2/50	-	74	83	N204	
TTT569	N416-23-24-10.5G	2/75	2/75	-	94	112	N204	
886-1080	N417-23-24-10.5G	2/100	2/100	-	95	115	N205	

Model No.	Mfg. No.	Description	Price /Each
886-1030	HS-3	Hose Stop	