



Safetube® Rod Canisters

- Protects electrodes from dirt, grease and moisture
- Pressure fitted O-ring provides a watertight seal
- Withstands electrodes heated to 250°F
- Requires only a quarter turn to remove cap
- Square sides prevent rolling
- Safety yellow colour increases visibility

14" CANISTER

- Holds up to 10 lbs. (5 kg) of 14" electrodes

18" CANISTER

- Holds up to 15 lbs. (7.5 kg) of 18" electrodes

40" CANISTER

- Holds up to 15 lbs. (7.5 kg) of 36" TIG/brazing rods

CARRY STRAP

- Provides easy transport for electrode canisters
- For use with 14" and 18" Safetubes®

WALL STORAGE RACK

- Provides storage for four 40" Safetube® TIG rod canisters



Model No.	Mfg. No.	Description	Capacity	Price /Each
ELECTRODE CANISTERS				
382-4010	1205441	Canister	Up to 10 lbs. of 14" Electrodes	
382-4040	1205455	Canister	Up to 15 lbs. of 18" Electrodes	
382-4020	1205451	Adjustable Carry Strap	-	
TIG ROD CANISTER				
TTV109	1205488	Canister	Up to 15 lbs. of 36" TIG Rods	
TTV110	1205490	Wall Storage Rack	-	

Dryrod® Portable Electrode Ovens

- Heating elements provide uniform, continuous heat for 100% protection of electrodes
- Standard features include an adjustable thermostat, indicator light and removable power cord with locking power inlet
- Optional digital thermometer available on Types 2, 5, and 15, reads in °F or °C
- Type 5 and 15 available with wheels and pull-handle for easy transport
- All units cUL approved



Model No.	Mfg. No.	Voltage	Capacity lbs.	Temperature Range °F	Price /Each
TYPE 1					
382-1205500	1205500	100/240 V AC/DC @ 60 watts	10	Preset to 300	
TYPE 2					
TTT575	1205512	100/240 V AC/DC @ 70 watts	20	100 - 300	
382-1205510*	1205510	100/240 V AC/DC @ 70 watts	20	100 - 300	
TYPE 5 W/HANDLES					
TTU576	1205523	120/240 V AC @ 300 watts	50	100 - 300	
TTU577*	1205521	120/240 V AC @ 300 watts	50	100 - 300	
TYPE 5 W/WHEELS					
TTT576	1205522	120/240 V AC @ 300 watts	50	100 - 300	
382-1205520*	1205520	120/240 V AC @ 300 watts	50	100 - 300	
TYPE 15					
TTT577	1205532	120/240 V AC @ 600 watts	150	100 - 300	
382-1205530*	1205530	120/240 V AC @ 600 watts	150	100 - 300	

*With digital thermometer


Dryrod® Bench Ovens

TYPE 15B

- Designed for small fabrication shops, jobsite trailer or welding lab
- Wire wrapped heating elements provide uniform, continuous heat for 100% protection of electrodes
- Adjustable thermostat ensures full temperature control
- Optional digital thermometer reads in °F or °C
- Powder coat finish enhances durable steel body
- cUL approved

TYPE 300

- Designed for large fabrication shops, refineries and on-site job trailers
- Ovens feature adjustable thermostatic control, indicator light and optional thermometer for instant temperature indication
- Circular shape promotes even heat distribution
- Redesigned shelving accommodates 50-lb cans
- cUL and CSA approved units

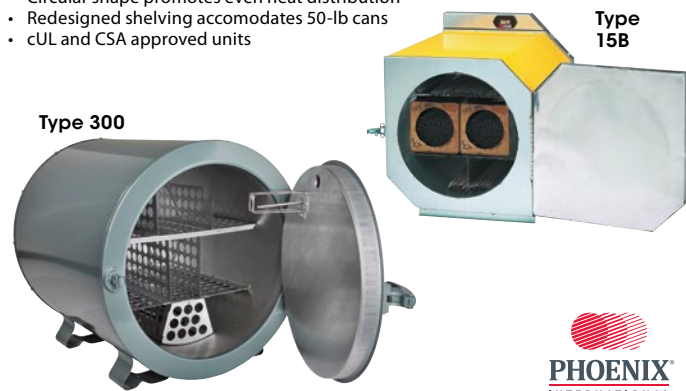

Model No.	Mfg. No.	Voltage	Capacity lbs.	Temperature Range °F	Price /Each
TYPE 15B					
TTT578	1205533	120/240 V AC @ 600 watts	150	100 - 300	
382-1205531*	1205531	120/240 V AC @ 600 watts	150	100 - 300	
TYPE 300					
382-1060	1200200	120/240 V AC @ 1000 watts	400	100 - 550	
382-1070**	1200202	120/240 V AC @ 1000 watts	400	100 - 550	
382-1065	1200100	240/480 V AC @ 1000 watts	400	100 - 550	
382-1075**	1200102	240/480 V AC @ 1000 watts	400	100 - 550	

* With digital thermometer

**Stacking version

Rod Holders

- Double leather bottom and metal swivel clip
- 5-ply Kevlar® stitched with rivet reinforcement

Model No. NP519
Price/Each

