



Forklift Jack

- Ideal for agriculture and industrial applications
- Primary saddle can handle fork lift trucks with flat or edged surfaces
- Can lift 4 tons with low height of 2-5/32" and lift 5 tons when lifting from cylinder saddle
- Weight: 95 lbs.
- Complies with: ASME-PALD



Model No.	Mfg No.	Lifting Capacity	Lowered Height"	Raised Height"	Price /Each
LW038	5214	5 Tons	2-5/32	17-15/16	

Forklift Jack


- Two-position lift pad can handle fork lift trucks with flat or edged surfaces
- Can lift 4 tons with low height of 2-5/8"
- Handle Length: 30"



Model No.	Mfg No.	Lifting Capacity	Lowered Height"	Raised Height"	Price /Each
LW039	1540	4 Tons	2-1/4	16-1/4	

Heavy-Duty Axle Jack

- Ideal for lifting loaded trailers and trucks
- Includes 2 height adapters for versatility
- Overall Height: 54"
- Overall Width: 12"
- Overall Length: 22"
- PSI Range: 90 - 175 PSI
- Stroke: 4.9375"
- Minimum Lifting Height wwith Saddle: 8-1/4"
- Maximum Lifting Height with Saddle: 13-1/8"
- Maximum Lifting Height with Screw and Adapter: 21-3/8"
- Handle Length: 48-3/4"
- Compliant: PALD

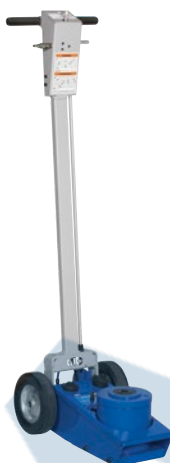

Model No.	Mfg No.	Lifting Capacity	Lifting Range"	Price /Each
LW015	5292	27.5 Tons	8.25 - 21.375	

End Lift Jack

- Automatic safety catch activates at 5 different heights
- Feature adjustable saddle position for better stance and stability
- Larger rear tires and larger front casters provide better handling on rougher surfaces such as gravel
- Air Pressure: 100 - 200 PSI
- Adjustable Saddle Distance: 29" to 41-3/4"
- Saddle dimensions: 4"W X 5-1/4"H
- Overall Dimensions: 41"W X 36"D X 67-1/2"H
- Distance From Lift Arm to Floor Support: 12-1/2"
- Manufacturer Warranty: OTC Lifetime Marathon Warranty®



Model No.	Mfg No.	Lifting Capacity	Lowered Height"	Raised Height"	Price /Each
LW013	5292	10 Tons	13	52	

Under Axle Jack

- Bring the versatility of air-assist operation to your shop's lifting tasks
- Self-retracting, spring return feature with long 49-1/2" T-handle lets you easily position jack under vehicles with long overhangs
- One pull of the handle activates the self-retracting 22-ton capacity ram without having to crawl underneath the vehicle
- Large rubber-tired steel wheels for maneuverability and movement on most types of terrain
- Three included saddle attachments for multiple height adjustments based on vehicle being lifted (3/4", 1-15/16", and 3-7/8" lengths)
- Ideal size for safely lifting heavy-duty vehicles
- Meets all 5 ASME PASE-2019 safety standards for service jacks
- Overall Height: 8-1/4"
- Overall Width: 11-3/4"
- Overall Length: 22-3/5"
- Air Pressure: 90 - 145 PSI
- Reach: 69.87"
- Saddle: 3" Diameter, round with centre notch
- Frame Height: 8.27"
- Footprint: 22.63" x 11.73"
- Wheels: (2) 7.88" Fixed, rubberized steel
- Manufacturer's Warranty: Limited lifetime



Model No.	Mfg No.	Lifting Capacity	Lifting Range"	Price /Each
FLU071	100893	22 Tons	8.27 - 20.67	

Like & Follow

Us On Social Media!