



CASTERS

Impact-Resistant Nylon Casters

- Medium heavy duty rigs, with top plate fitting
- Low rolling and swivel resistance for smooth running performance
- High chemical resistance to many aggressive substances
- Operating temperature: -15° F to +175° F
- Wheel Material: Nylon • Frame Material: Steel

Bolt Hole Spacing: 2-5/8" x 3-5/8"
 (67 mm x 92 mm) - 3" x 3" (76 mm x 76 mm)
Bolt Hole Size: 3/8" (9.52 mm)
Plate Size: 4" x 4-1/2"
 (102 mm x 114 mm)



Model No.	Wheel Diameter	Capacity	Tread Width	Bearing Type	Total Height"	Price /Each
SWIVEL						
M0535	3-1/8" (79.5 mm)	350 lbs. (159 kg.)	1-7/16" (37 mm)	Ball Bearing	4-3/8	
M0536	4" (102 mm)	615 lbs. (280 kg.)	1-7/16" (37 mm)	Ball Bearing	5-1/8	
M0537	5" (127 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Ball Bearing	6-1/8	
M0538	6" (152 mm)	660 lbs. (300 kg.)	2" (51 mm)	Plain Bore	7-1/2	
M0539	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Plain Bore	9-1/4	
M0540	6" (152 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	7-1/2	
M0541	6-5/16" (160 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	7-7/8	
M0542	8" (203 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	9-1/2	

Model No.	Wheel Diameter	Capacity	Tread Width	Bearing Type	Total Height"	Price /Each
RIGID						
M0543	3-1/8" (79.5 mm)	350 lbs. (159 kg.)	1-7/16" (37 mm)	Ball Bearing	4-3/8	
M0544	4" (102 mm)	615 lbs. (280 kg.)	1-7/16" (37 mm)	Ball Bearing	5-1/8	
M0545	5" (127 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Ball Bearing	6-1/8	
M0546	6" (152 mm)	660 lbs. (300 kg.)	2" (51 mm)	Plain Bore	7-1/2	
M0547	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Plain Bore	9-1/4	
M0548	6" (152 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	7-1/2	
M0549	6-5/16" (160 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	7-7/8	
M0550	8" (203 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	9-1/2	

Model No.	Wheel Diameter	Capacity	Tread Width	Bearing Type	Total Height"	Price /Each
SWIVEL W/BRAKE						
M0551	3-1/8" (79.5 mm)	350 lbs. (159 kg.)	1-7/16" (37 mm)	Ball Bearing	4-3/8	
M0552	4" (102 mm)	615 lbs. (280 kg.)	1-7/16" (37 mm)	Ball Bearing	5-1/8	
M0553	5" (127 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Ball Bearing	6-1/8	
M0554	6" (152 mm)	660 lbs. (300 kg.)	2" (51 mm)	Plain Bore	7-1/2	
M0555	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Plain Bore	9-1/4	
M0556	6" (152 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	7-1/2	
M0557	6-5/16" (160 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	7-7/8	
M0558	8" (203 mm)	1250 lbs. (568 kg.)	2" (51 mm)	Ball Bearing	9-1/2	

High-Quality Thermoplastic Casters

- Low-noise operation, rolling and swivel resistance
- Non-marking, non-staining surface
- High chemical resistance to many aggressive substances
- Operating temperature: -15° F to +160° F
- Wheel Material: Thermoplastic Polyurethane • Frame Material: Steel

Bolt Hole Spacing: 2-5/8" x 3-5/8"
 (67 mm x 92 mm) - 3" x 3" (76 mm x 76 mm)
Bolt Hole Size: 3/8" (9.52 mm)
Plate Size: 4" x 4-1/2"
 (102 mm x 114 mm)
Bearing Type: Ball Bearing




Model No.	Wheel Diameter	Capacity	Tread Width	Caster Type	Total Height"	Price /Each
M0574	3-1/8" (79.5 mm)	330 lbs. (150 kg.)	1-1/4" (31.8 mm)	Swivel	4-3/8	
M0575	4" (102 mm)	440 lbs. (200 kg.)	1-1/4" (31.8 mm)	Swivel	5-1/8	
M0576	5" (127 mm)	550 lbs. (250 kg.)	1-1/4" (31.8 mm)	Swivel	6-1/8	
M0577	6" (152 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Swivel	7-11/16	
M0578	8" (203 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Swivel	9-1/4	
M0579	3-1/8" (79.5 mm)	330 lbs. (150 kg.)	1-1/4" (31.8 mm)	Rigid	4-3/8	
M0580	4" (102 mm)	440 lbs. (200 kg.)	1-1/4" (31.8 mm)	Rigid	5-1/8	
M0581	5" (127 mm)	550 lbs. (250 kg.)	1-1/4" (31.8 mm)	Rigid	6-1/8	
M0582	6" (152 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Rigid	7-11/16	
M0583	8" (203 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Rigid	9-1/4	
M0584	3-1/8" (79.5 mm)	330 lbs. (150 kg.)	1-1/4" (31.8 mm)	Swivel w/Brake	4-3/8	
M0585	4" (102 mm)	440 lbs. (200 kg.)	1-1/4" (31.8 mm)	Swivel w/Brake	5-1/8	
M0586	5" (127 mm)	550 lbs. (250 kg.)	1-1/4" (31.8 mm)	Swivel w/Brake	6-1/8	
M0587	6" (152 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Swivel w/Brake	7-11/16	
M0588	8" (203 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Swivel w/Brake	9-1/4	

High-Quality Polyurethane Elastomer Casters

- High operational comfort due to extremely thick, elastic tread
- Low-noise operation and rolling resistance
- High abrasion resistance, cut and tear propagation resistance
- Operating temperature: -15° F to +160° F
- Wheel Material: Polyurethane Elastomer • Frame Material: Steel

Bolt Hole Spacing: 2-5/8" x 3-5/8"
 (67 mm x 92 mm) - 3" x 3" (76 mm x 76 mm)
Bolt Hole Size: 3/8" (9.52 mm)
Plate Size: 4" x 4-1/2" (102 mm x 114 mm)

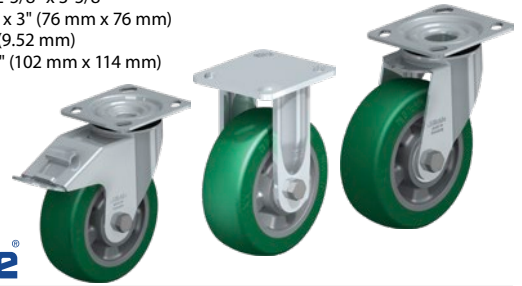

Model No.	Wheel Diameter	Capacity	Tread Width	Bearing Type	Total Height"	Price /Each
SWIVEL						
M0559	3-1/8" (79.5 mm)	505 lbs. (230 kg.)	1-9/16" (40 mm)	Ball Bearing	4-3/8	
M0560	4" (102 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Ball Bearing	5-1/8	
M0561	5" (127 mm)	770 lbs. (350 kg.)	1-9/16" (40 mm)	Ball Bearing	6-1/8	
M0562	6" (152 mm)	660 lbs. (300 kg.)	2-1/8" (54 mm)	Ball Bearing	7-1/2	
M0563	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Ball Bearing	9-1/4	

Model No.	Wheel Diameter	Capacity	Tread Width	Bearing Type	Total Height"	Price /Each
RIGID						
M0564	3-1/8" (79.5 mm)	505 lbs. (230 kg.)	1-9/16" (40 mm)	Ball Bearing	4-3/8	
M0565	4" (102 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Ball Bearing	5-1/8	
M0566	5" (127 mm)	770 lbs. (350 kg.)	1-9/16" (40 mm)	Ball Bearing	6-1/8	
M0567	6" (152 mm)	660 lbs. (300 kg.)	2-1/8" (54 mm)	Ball Bearing	7-1/2	
M0568	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Ball Bearing	9-1/4	

Model No.	Wheel Diameter	Capacity	Tread Width	Bearing Type	Total Height"	Price /Each
SWIVEL W/BRAKE						
M0569	3-1/8" (79.5 mm)	505 lbs. (230 kg.)	1-9/16" (40 mm)	Ball Bearing	4-3/8	
M0570	4" (102 mm)	660 lbs. (300 kg.)	1-9/16" (40 mm)	Ball Bearing	5-1/8	
M0571	5" (127 mm)	770 lbs. (350 kg.)	1-9/16" (40 mm)	Ball Bearing	6-1/8	
M0572	6" (152 mm)	660 lbs. (300 kg.)	2-1/8" (54 mm)	Ball Bearing	7-1/2	
M0573	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Ball Bearing	9-1/4	

High-Quality Polyurethane Elastomer Casters

- Low-noise operation and rolling resistance
- High abrasion resistance, cut and tear propagation resistance
- Non-marking, non-staining surface
- Operating temperature: -15° F to +160° F
- Wheel Material: Polyurethane Elastomer • Frame Material: Steel

Bolt Hole Spacing: 2-5/8" x 3-5/8" (67 mm x 92 mm) - 3" x 3" (76 mm x 76 mm)
Bolt Hole Size: 3/8" (9.52 mm)
Plate Size: 4" x 4-1/2" (102 mm x 114 mm)
Bearing Type: Ball Bearing



Model No.	Wheel Diameter	Capacity	Tread Width	Caster Type	Total Height"	Price /Each
M0589	3-1/8" (79.5 mm)	395 lbs. (180 kg.)	1-1/8" (28.6 mm)	Swivel	4-3/8	
M0590	4" (102 mm)	550 lbs. (250 kg.)	1-9/16" (40 mm)	Swivel	5-1/8	
M0591	5" (127 mm)	770 lbs. (350 kg.)	1-9/16" (40 mm)	Swivel	6-1/8	
M0592	6" (152 mm)	660 lbs. (300 kg.)	2" (51 mm)	Swivel	7-1/2	
M0593	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Swivel	9-1/4	
M0594	3-1/8" (79.5 mm)	395 lbs. (180 kg.)	1-1/8" (28.6 mm)	Rigid	4-3/8	
M0595	4" (102 mm)	550 lbs. (250 kg.)	1-9/16" (40 mm)	Rigid	5-1/8	
M0596	5" (127 mm)	770 lbs. (350 kg.)	1-9/16" (40 mm)	Rigid	6-1/8	
M0597	6" (152 mm)	660 lbs. (300 kg.)	2" (51 mm)	Rigid	7-1/2	
M0598	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Rigid	9-1/4	
M0599	3-1/8" (79.5 mm)	395 lbs. (180 kg.)	1-1/8" (28.6 mm)	Swivel w/Brake	4-3/8	
M0600	4" (102 mm)	550 lbs. (250 kg.)	1-9/16" (40 mm)	Swivel w/Brake	5-1/8	
M0601	5" (127 mm)	770 lbs. (350 kg.)	1-9/16" (40 mm)	Swivel w/Brake	6-1/8	
M0602	6" (152 mm)	660 lbs. (300 kg.)	2" (51 mm)	Swivel w/Brake	7-1/2	
M0603	8" (203 mm)	660 lbs. (300 kg.)	2" (51 mm)	Swivel w/Brake	9-1/4	