




Air-Operated Diaphragm Pumps

- Positive displacement double diaphragm design
- Chemical-resistant polypropylene housing with Santoprene® or Viton® seals
- Quick disconnect ports for easy installation
- Large exhaust muffler for quiet operation

Max. Flow: 5.0 gpm
Self-Priming: 15' dry, 20' wet
Fluid Inlet Pressure: 30 PSI max
Air Supply Inlet: 1/4" hose barb
Max. Pressure: 100 PSI
Seals: Viton®

Model No. TGZ354
Mfg. No. G573215A
Price/Each \$

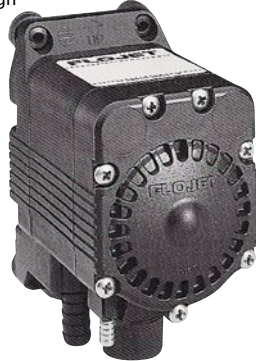


FLOJET

- Positive displacement double diaphragm design
- Oil-resistant acetal copolymer housing with Santoprene® or Viton® seals
- Quick disconnect ports for easy installation

Max. Flow: 1.9 gpm
Self-Priming: 28' dry, 32' wet
Fluid Inlet Pressure: 15 PSI max
Air Supply Inlet: 1/4" hose barb
Max. Pressure: 60 PSI
Seals: Viton®

Model No. TGZ357
Mfg. No. 5100020
Price/Each \$



Quad Diaphragm Pumps

- Excellent self-priming capability allows pump to be located above the liquid level
- Chemical-resistant polypropylene housing with Santoprene® and Viton® elastomers
- Pump can run dry without damage

Max. Flow: 5.0 gpm
Self-Priming: 8' dry
Max. Pressure: 40 PSI
Inlet Ports: 1/2" Hose Barb
Seals: Viton®/Santoprene®
Voltage: 115 V

Model No. TGZ361
Mfg. No. 4100512
Price/Each \$



FLOJET

- Excellent self-priming capability
- Chemical-resistant polypropylene housing with Santoprene® and EPDM elastomers
- Built-in pressure switch automatically starts/stops pump

Max. Flow: 3.5 gpm
Self-Priming: 8' dry
Max. Pressure: 40 PSI
Inlet Ports: 1/2" or 3/4" hose barb
Seals: EPDM/Santoprene®
Voltage: 115 V

Model No. TGZ362
Mfg. No. 4300042
Price/Each \$



Diaphragm Pumps



A. 3/8" DIAPHRAGM PUMPS

- Quiet operation
- **Typical applications:** Circulation of low viscosity inks, stains and dyes, coolant circulation and evacuation, waste fluid removal and on-demand batch chemical metering
- Maximum Suction Lift: 12'

B. 1/2" DIAPHRAGM PUMPS

- High flow rates in a small, portable package
- Maximum Suction Lift: 15'

C. 3/4" DIAPHRAGM PUMPS

- High flow rates in a small, portable package
- **Typical applications:** Machine lubrication servicing drum evacuation, water treatment, plating and dip tanks
- Maximum Suction Lift: 12'

D. 1" DIAPHRAGM PUMPS

- Heavy-duty production capabilities
- **Typical applications:** Drum fluid transfer, chemical evacuation, circulating plating chemical tank, sump and tank drainage

Model No.	Body	Diaphragm	Max. Free Flow Delivery GPM	Max. Air Consumption SCFM	Price /Each
DA407	Acetal	Teflon®	7	6	
A. DA408	Acetal	Hytrel®	7	6	
DA409	Polypropylene	Teflon®	7	6	
DA410	Polypropylene	Hytrel®	7	6	
B. DA411	Polypropylene	Teflon®	15	28	
DA412	Polypropylene	Buna-N	15	28	
DA413	Aluminum	Teflon®	15	28	
C. DA414	Aluminum	Buna-N	15	28	
DA415	SST	Teflon®	15	28	
DA416	Aluminum	Hytrel®	50	60	
D. DA417	Aluminum	Teflon®	50	60	
DA418	SST	Teflon®	50	60	