



7" x 12" Metal Cutting Dual Swivel Bandsaws


- Head swivels 0° - 45° to the left and right
- Adjustable ball bearing guides
- Portable design for easy movement
- Coolant system
- Automatic shut-off switch
- Adjustable hydraulic downfeed control



Model No.	TBU410
Mfg. No.	KC-712DS
Cutting capacity at 90°:	Rect. 7" x 12", Round 7"
Cutting capacity at 45°:	Rect. 3-1/2" x 5-1/2", Round 5"
Speeds:	4 (98, 164, 246, 328 FPM)
Blade:	0.75" x 0.032" x 93"
Motor:	1 HP, 6.2 A, 1 phase, 60 Hz
Voltage:	220 V
Dimensions:	50" L x 26" W x 44" H
Weight:	325 lbs.
Price/Each	\$

10" x 18" Metal Cutting Bandsaws

- Carbide ball bearing blade guides
- Centralized 24 V control panel and automatic shut-off
- Adjustable hydraulic down feed control
- Tru-Lock™ cam lock and quick positioning vise system with fully adjustable jaws for 0° to 45° angled cuts
- To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible
- Coolant system with regular valves provide an even flow of coolant to the blade

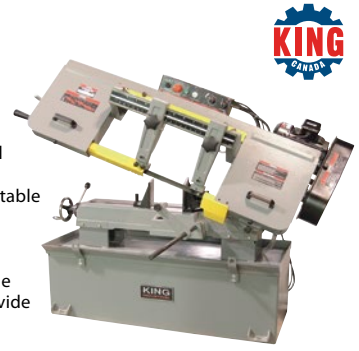

Model No.	TLZ123	TLZ124
Mfg. No.	KC-227-2	KC-227-6
Cutting capacity at 90°:	Rect. 10" x 18", Round 10"	Rect. 10" x 18", Round 10"
Cutting capacity at 45°:	Rect. 7" x 9-3/8", Round 10"	Rect. 7" x 9-3/8", Round 10"
Speeds:	4 (114, 196, 288, 377 FPM)	4 (114, 196, 288, 377 FPM)
Blade:	122" x 1" x .032"	122" x 1" x .032"
Motor:	2 HP, 15 A, 1 phase, 60 Hz	2 HP, 2.6 A, 3 phase, 60 Hz
Voltage:	220 V	600 V
Dimensions:	70" x 27" x 42"	70" x 27" x 42"
Weight:	634 lbs.	634 lbs.
Price/Each	\$	\$

9" x 18" Metal Cutting Swivel Bandsaws

- Carbide ball bearing blade guides with rollers
- Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- Precision blade tension adjustment
- Quick-positioning vise with fully adjustable jaws for 0° to 45° angles
- Includes: Coolant system



Model No.	TZ538
Mfg. No.	KC-918S-V
Cutting capacity at 90°:	Rect. 9" x 18", Round 9"
Cutting capacity at 45°:	Rect. 9" x 11", Round 9"
Speeds:	(80-250 FPM) variable
Blade:	131-3/4" x 1" x 0.032"
Motor:	2 HP, 15 A, 1 phase, 60 Hz
Voltage:	220 V
Dimensions:	73" L x 32" W x 42" H
Weight:	1070 lbs.
Price/Each	\$

10" x 18" Variable Speed Swivel Metal Cutting Bandsaws

- Swivel base from 0° to 45°
- Position adjustable control panel and automatic shut-off
- Adjustable hydraulic down feed control
- Carbide ball bearing blade guides
- To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible
- Exclusive 24 V control panel
- Coolant system with regular valves provide an even flow of coolant to the blade



Model No.	TMA040	TMA041
Mfg. No.	KC-228S-V-2	KC-228S-V-6
Cutting capacity at 90°:	Rect. 10" x 18", Round 10"	Rect. 10" x 18", Round 10"
Cutting capacity at 45°:	Rect. 7-7/8" x 7-7/8", Round 7-7/8"	Rect. 7-7/8" x 7-7/8", Round 7-7/8"
Speeds:	(73-312 FPM) variable	(73-312 FPM) variable
Blade:	121-3/4" x 1" x .035"	121-3/4" x 1" x .035"
Motor:	2 HP, 15 A, 1 phase, 60 Hz	2 HP, 2.6 A, 3 phase, 60 Hz
Voltage:	220 V	600 V
Dimensions:	81" x 28" x 48"	81" x 28" x 48"
Weight:	845 lbs.	845 lbs.
Price/Each	\$	\$

18" Metal Cutting Bandsaws

- Hand wheel controls speed
- Speed changes while the machine is in operation
- Bandsaw blade welder and grinder included
- Includes: 4-way tilting table, and work light



Model No.	TS325
Mfg. No.	KC-450
Height under guides:	10"
Throat capacity:	18"
Speeds:	(82-384 SFPM) variable
Blade width:	1/8" - 5/8"
Blade length:	135" - 140"
Table size:	22-1/4" x 19-5/8"
Table tilt (all directions):	15°
Motor:	1 HP, 7.5 A, 1 phase, 60 Hz
Voltage:	220 V
Table height from floor:	38"
Dimensions:	26" L x 42" W x 73" H
Weight:	1015 lbs.
Price/Each	\$

Variable Speed Bandsaws

- Designed for both wood and metal cutting applications
- Variable frequency drive speed control and digital display for blade speed in feet/min
- Blade speed digital readout



Model No.	TYP040
Mfg. No.	KC-1700WM-VS
Height of cut:	12"
Cutting capacity frame to blade:	16-1/4"
Blade size:	131-5/8" x (1/8"-1") x 1/32"
Table size:	23-1/2" W x 17" L
Motor:	2 HP
Voltage:	220 V
Amps:	7A
Variable Speeds (Wood):	540-3600 SFPM
Variable Speeds (Metal):	100-650 SFPM
Overall dimensions:	33" W x 30" L x 74" H
Style:	Vertical
Price/Each	\$