



GEMINI RIGHTCUT

- Quality aluminum oxide grain
- Consistent performance at a competitive price
- Ideal for small jobs on a variety of metal applications from carbon to stainless steels
- Unique reinforcement design
- Provides safety, strength and straight cuts
- Extra thin
- Quick cutting action and low kerf loss
- Type 27



NORTON

| Model No. | Mfg. No. | D" | x | Size T" | x | A" | Max RPM | Price /Each |
|-----------|----------|-------|---|---------|---|-----|---------|-------------|
| NS093 | RC45G27 | 4 1/2 | x | 3/64 | x | 7/8 | 13 580 | |
| NS094 | RC5G27 | 5 | x | 3/64 | x | 7/8 | 12 225 | |
| NS096 | RC7G27 | 7 | x | 1/16 | x | 7/8 | 8730 | |

BLUEFIRE RIGHT ANGLE GRINDERS

- Upgraded zirconia alumina grain chemistry and shape, blended with premium aluminum oxide grain provides 2-3 times the life of aluminum oxide wheels
- Broad utility: from light- to heavy-pressure applications, on a wide range of materials: stainless steel, carbon steel, and alloys, to grey iron



NORTON

| Model No. | Mfg. No. | D" | x | Size T" | x | A" | Max RPM | Price /Each |
|----------------|-------------|-------|---|---------|---|-----|---------|-------------|
| TYPE 01 | | | | | | | | |
| NR991 | 66252843208 | 4 1/2 | x | 0.045 | x | 7/8 | 13 580 | |
| NO015 | 66252843209 | 5 | x | 0.045 | x | 7/8 | 12 225 | |
| TYPE 27 | | | | | | | | |
| NR994 | 66252843219 | 4 1/2 | x | 1/16 | x | 7/8 | 13 580 | |
| NO018 | 66252843220 | 5 | x | 0.045 | x | 7/8 | 12 225 | |

QUANTUM3™ RIGHTCUT™ CUT-OFF WHEEL

- 100% advanced ceramic alumina grain with a special shape for comfort and performance
- Unique bond system prevents premature grain released maximizing wheel life
- Great choice for stainless steel and carbon steel applications



NORTON

| Model No. | Mfg. No. | D" | x | Size T" | x | A" | Max RPM | Price /Each |
|----------------|-------------|-------|---|---------|---|--------|---------|-------------|
| TYPE 01 | | | | | | | | |
| NV619 | 66252838454 | 4-1/2 | x | 0.045 | x | 7/8 | 13 580 | |
| NY029 | 66252838455 | 4-1/2 | x | 1/16 | x | 7/8 | 13 580 | |
| NY031 | 66252838460 | 5 | x | 0.045 | x | 7/8 | 12 225 | |
| NV877 | 66252838462 | 5 | x | 1/16 | x | 7/8 | 12 225 | |
| NY033 | 66252838465 | 6 | x | 1/16 | x | 7/8 | 10 185 | |
| TYPE 27 | | | | | | | | |
| NV631 | 66252838456 | 4 1/2 | x | 1/16 | x | 7/8 | 13 580 | |
| NY030 | 66252838457 | 4 1/2 | x | 1/16 | x | 5/8-11 | 13 580 | |
| NY032 | 66252838464 | 5 | x | 1/16 | x | 7/8 | 12 225 | |
| NY034 | 66252838466 | 6 | x | 1/16 | x | 7/8 | 10 185 | |

D x T x A: Diameter x Thickness x Arbor Size

TOUGH CUT™ TYPE 01

- Cut fast and free without binding to minimize the load on the tool and maintain high RPM for a clean cut and best all-around performance



WALTER
Surface Technologies

| Model No. | Mfg. No. | Size D" | x | T" | x | A" | Grade | Max RPM | Price /Each |
|-----------|----------|---------|---|------|---|-----|-------|---------|-------------|
| VV155 | 11-R-042 | 4 1/2 | x | 3/32 | x | 7/8 | A-30 | 13 300 | |
| VV156 | 11-R-052 | 5 | x | 3/32 | x | 7/8 | A-30 | 12 200 | |
| VV157 | 11-R-062 | 6 | x | 3/32 | x | 7/8 | A-30 | 10 200 | |
| VV158 | 11-R-072 | 7 | x | 3/32 | x | 7/8 | A-30 | 8 600 | |

Circular Saw Reinforced Cut-Off Wheels



MASONRY & METAL TYPE 01

- Versatile, ideal for slotting and cutting when initial cost is a main consideration
- **Gemini all purpose:** Quality aluminum oxide abrasive, sets the aluminum oxide general purpose industry standard for cutting rough sides all material in metal fabrication applications
- **Norton masonry:** Sharp, silicon carbide grain, engineered for all masonry materials such as concrete, brick and asphalt
- **Norton metal:** Quality aluminum oxide abrasive, designed for cutting alloys, steels and ferrous metals




NORTON

| Model No. | Mfg. No. | Size D" | x | T" | x | A" | Description | Max RPM | Price /Each |
|-----------|----------|---------|---|-----|---|-----|-------------|---------|-------------|
| NS217 | C0718M | 7 | x | 1/8 | x | DM* | Metal | 8730 | |
| NS218 | C0718MA | 7 | x | 1/8 | x | DM* | Masonry | 8730 | |
| NS221 | C0818M | 8 | x | 1/8 | x | DM* | Metal | 7640 | |
| NS222 | C0818MA | 8 | x | 1/8 | x | DM* | Masonry | 7640 | |

* DM: denotes diamond mount; 5/8" hole bushing included

ZIP CUT™ TYPE 01

- Cut faster, freer and cooler, requiring less power than standard thin cut-off wheels
- Heavily reinforced for extra safety and very flexible and resilient to resist twisting and bending

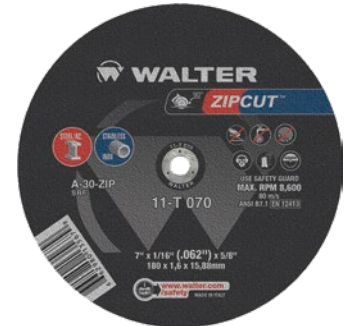

WALTER
Surface Technologies

| Model No. | Mfg. No. | Size D" | x | T" | x | A" | Grade | Max RPM | Price /Each |
|-----------|----------|---------|---|------|---|-----|----------|---------|-------------|
| VV153 | 11-T-070 | 7 | x | 1/16 | x | 5/8 | A-30-ZIP | 8 600 | |
| VE482 | 11-T-080 | 8 | x | 1/16 | x | 5/8 | A-30-ZIP | 7 600 | |