




## Load Binders

- Forged and heat treated
- With two strong, full rotation swivels
- Profiled mid-section to give extra stability
- Working load limit rating embossed on handle

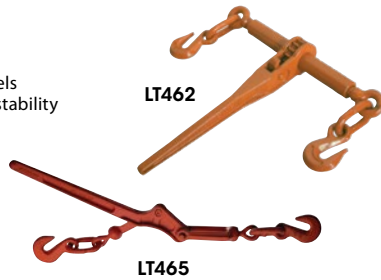

| Model No. | Chain Size" | WLL lbs. | Wt. lbs. | Type                   | Price /Each |
|-----------|-------------|----------|----------|------------------------|-------------|
| LT465     | 1/4 - 5/16  | 2600     | 3.5      | Lever Chain            |             |
| LT466     | 5/16 - 3/8  | 5400     | 8.1      | Lever Chain            |             |
| LT467     | 3/8 - 1/2   | 9200     | 12.4     | Lever Chain            |             |
| LT462     | 1/4 - 5/16  | 2600     | 3.7      | Ratchet Tie Down       |             |
| LT463     | 5/16 - 3/8  | 5400     | 10       | Ratchet Tie Down       |             |
| LT464     | 3/8 - 1/2   | 9200     | 12.9     | Ratchet Tie Down       |             |
| LT468     | 5/16 - 3/8  | 5400     | 8.9      | Recoilless Load Binder |             |

## Grade 70 Transport Chain Tie-Downs

- Manufactured in accordance with the Department of Transportation regulations
- Each assembly has a rating tag attached to meet NSC Standard 10 requirements
- Includes grade 70, alloy steel clevis grab hooks on each end
- Designed for use in cargo securement, towing and logging
- Grade 70 chains must not be used for overhead lifting
- High quality stamped grade 70 chain links
- Yellow chromate finish
- Design factor 4:1



| Model No. | Chain Length" | Trade Size | Working Load Limit    | Price /Each |
|-----------|---------------|------------|-----------------------|-------------|
| LU982     | 20' (6.1 m)   | 5/16"      | 4700 lbs. (2.35 tons) |             |
| LU983     | 25' (7.6 m)   | 5/16"      | 4700 lbs. (2.35 tons) |             |
| LU984     | 20' (6.1 m)   | 3/8"       | 6600 lbs. (3.3 tons)  |             |
| LU985     | 25' (7.6 m)   | 3/8"       | 6600 lbs. (3.3 tons)  |             |

## Service Jack with Vehicle Stands

- All models designed for the professional user
- All models equipped with safety valve to prevent overloading
- Rear mounted swivel casters for easy maneuverability
- Heavy duty pump, ram and cylinders are precision machined and inspected to ensure long service life and superior performance
- Operation Type: Manual Hydraulic

### UAV870

- Combo pack promotion of 2-1/2 Ton Service Jack and 3 Ton Safety Stands
- Lowered Height: 5"
- Raised Height: 19-1/4"
- Length: 27"

Model No. UAV870  
Mfg. No. 030416  
Price/Each \$

### UAV872

- Combo pack promotion of 3-1/2 Ton Service Jack and 4 Ton Safety Stands
- Lowered Height: 5-1/8"
- Raised Height: 21"
- Length: 28-3/4"

Model No. UAV872  
Mfg. No. 030420  
Price/Each \$



## 2XP Floor Jack

- 2xP – Double Pump design for fast efficient lifting
- Superior grade "soft" components for better performance in increased jack life
- Padded handle bumper protects vehicle finish
- Equipped with Safety Bypass to prevent overloading
- Rear mounted swivel casters for easy manoeuvrability
- Convenient integral parts tray
- Lifting Capacity: 3 Tons
- Lowered Height: 4-7/10"
- Raised Height: 18-1/10"
- Operation Type: Manual Hydraulic
- Length: 24.7"
- Weight: 69.4 lbs.

Model No. UAV871  
Mfg. No. 030417  
Price/Each \$



## 2XP Floor Jack

- Equipped with a double pump design for fast and efficient lifting
- Heavy grade steel construction provides added strength and durability
- Tough powder coated frame provides greater protection and long service life
- Professional grade casters provide easy transport and maneuverability
- Bypass valve prevents accidental overload and provides added operator safety
- Lifting Capacity: 4 Tons
- Lowered Height: 4-1/3"
- Raised Height: 20-1/2"
- Operation Type: Manual Hydraulic
- Chassis Length: 28.3"
- Handle Length: 50"
- Weight: 46.9 lbs.

Model No. UAV869  
Mfg. No. 030408  
Price/Each \$



## Super Heavy-Duty 2-Stage Air Hydraulic Truck Jack

- The extra light weight and portability makes this the ideal service jack for service vehicles
- The extra long removable handle and rugged rear wheels make for easy positioning of this jack in hard to reach places
- An integral Descent Metering Valve maintains a controlled and safe lowering of the load
- The piston head seal design is borrowed from industrial technology providing a superior low and high pressure seal, giving this jack a much better hold under severe load conditions
- Double polished chromed pistons allow for much tighter tolerances which reduce oil bypassing and reduced ram scoring
- Air assisted lowering speeds up ram retraction
- Built-in overload safety valve prevents damage to unit due to excessive load
- Comes with 2 extensions (75mm & 45mm) and saddle adapter
- Units are tested to -25°C and +45°C as well as off centre loading to ensure a long life under even the harshest conditions
- Operation Type: Air Hydraulic
- UAV874: 2 stages and lifting capacities of 30 and 15 ton make this a very versatile jack
- UAV875: 2 stages and lifting capacities of 50 Ton and 25 Ton built tough for the rigors of the heavy duty trucking, agricultural and fleet business



| Model No. | Mfg. No. | Lowered Height" | Raised Height" | Weight lbs. | Working Air Pressure | Price /Each |
|-----------|----------|-----------------|----------------|-------------|----------------------|-------------|
| UAV874    | 030474   | 2-9/10          | 8-8/10         | 66          | 116-145 PSI          |             |
| UAV875    | 030475   | 4-6/10          | 13             | 161         | 116-174 PSI          |             |